# FRONT VIEW

| Pin # | Assignment |
|---|---|
| 1 | Top |
| 2 | Left |
| 3 | Bottom |
| 4 | Right |

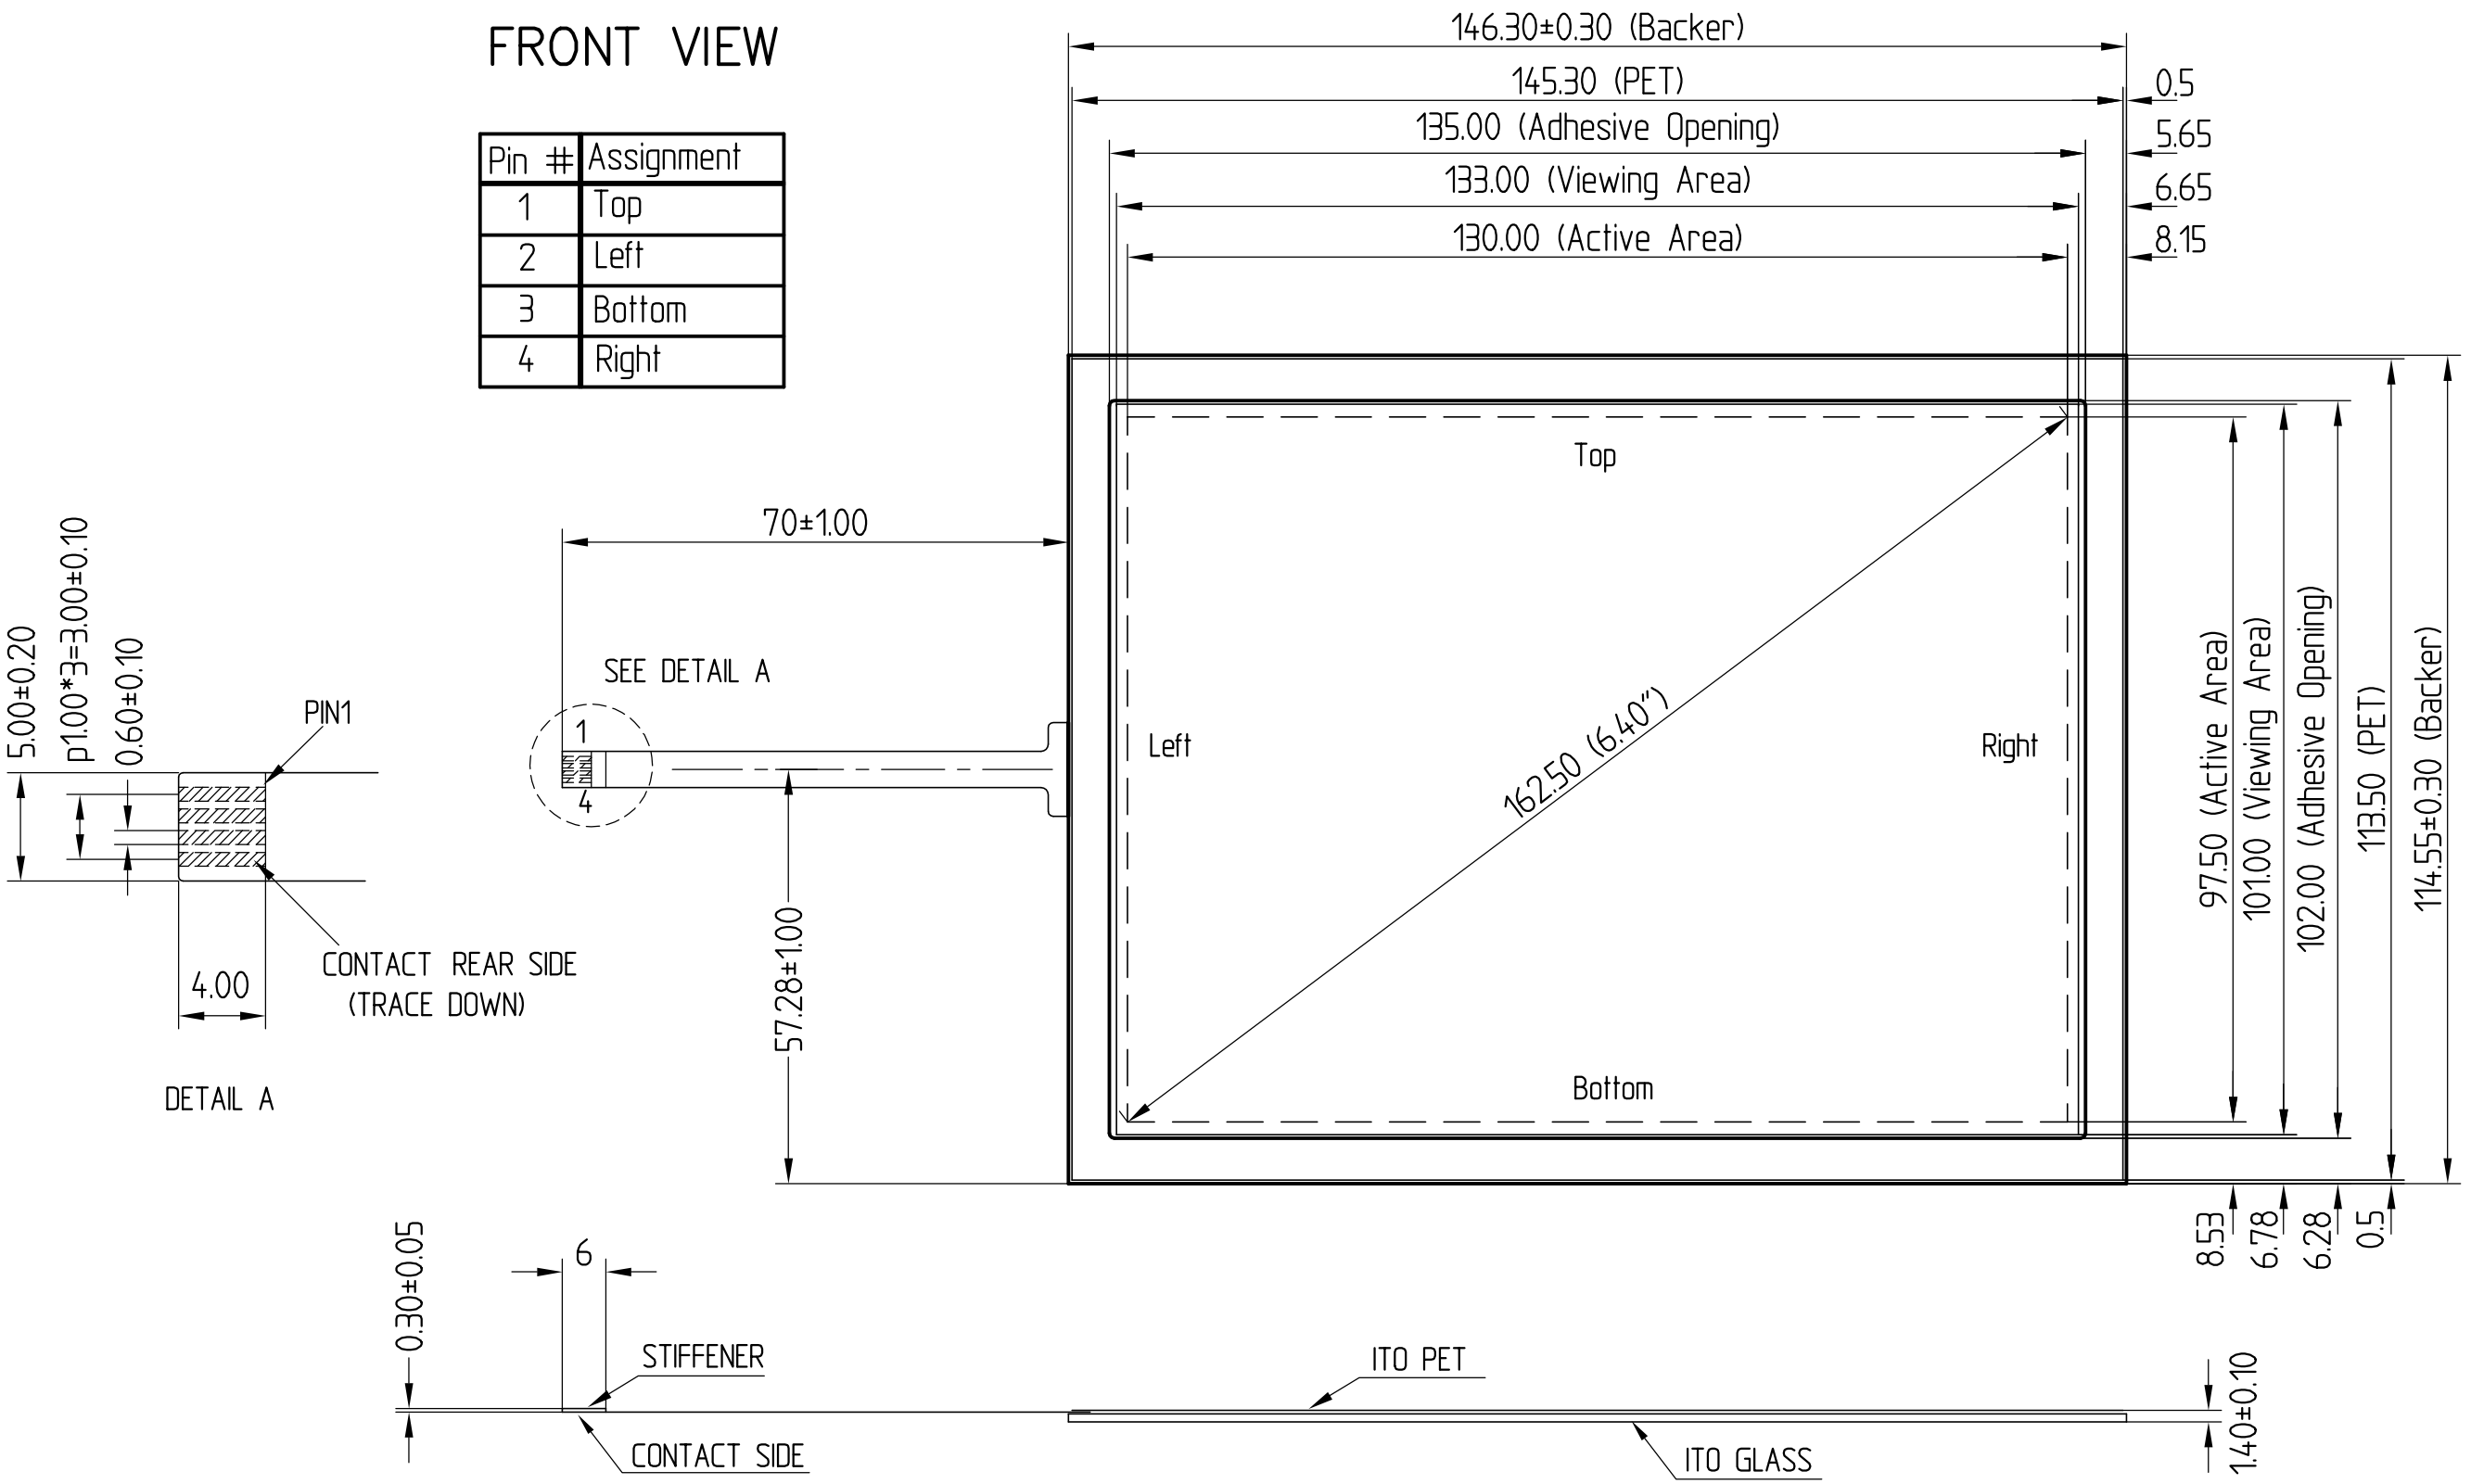


**NOTES:**

1. ITO GLASS THICKNESS : 1.10mm
2. OVERALL THICKNESS : 1.40±0.10mm
3. CONNECTOR AND PINOUT AS INDICATED
4. FRONT SURFACE : ANTI-GLARE HARDCOAT
5. LAYER TO LAYER ASSEMBLY TOLERANCE: ±0.30mm
6. TAIL TYPE : FPC
7. OTHER SPEC : SEE APPROVAL SHEET

| REV. | MODIFIKAT. | DATE | NAME |
|---|---|---|---|
| | | | |

| | DATE | NAME |
|---|---|---|
| 2003 | | |
| PROVIDER | 22.01. | HPF |
| APPROVED | 22.01. | Maurer |

ARTICEL: TOUCH 6,40" 4 WIRE

TOLERANCES UNLESS SPECIFIED
.X = ±0.5
.XX = ±0.5
.XXX = ±0.3

SCALE: 1 : 1

UNIT: mm

AMT-DWG-NO: 9525-0-01 / REV -

Manufactured by Apex Material Technology Corp.

SCHURTER
D-79346 Endingen

SCHURTER-ORDER-NO: 1070.0445 -

SHEET 1 OF 1

REV

COPYRIGHT PROTECTION ACCORDING TO DIN 34