

Shock-Safe Fuseholder, 5 x 20 mm, Fingergrip, Solder



250 VAC · 1.3W

**Description**

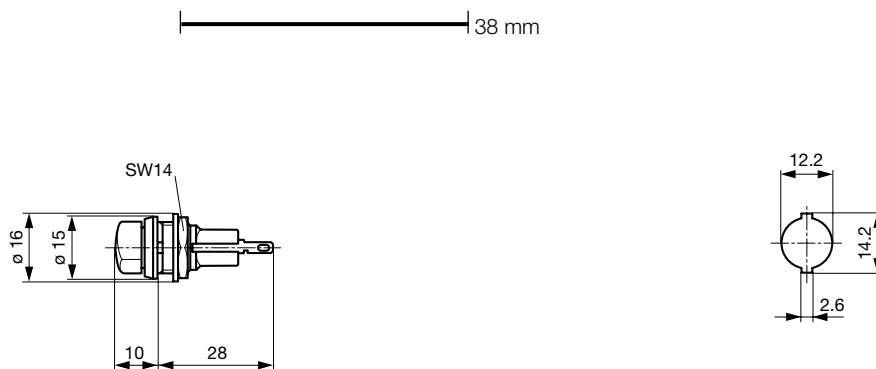
- Screw type fuse carrier

Weblinks

pdf, html, General Product Information, Approvals, RoHS, CHINA-RoHS, e-Shop, SCHURTER-Stock-Check, Distributor-Stock-Check

Technical Data

Fuse-Link	5 x 20 mm	Soldering Methods	Iron
Mounting	Panel Mount, Front-Side	Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Mounting	Fixing Nut	Admissible Torque on Fixing Nut	max 1.0Nm
Terminal	Solder	Panel Thickness s	max 5 mm
Rated Voltage	250 VAC		
Rated Current	6.3 A		
Rated Power Acceptance IEC	1.3 W @ Ta 23 °C		
Degree of Protection	IP 40		
Material: Socket	Thermoset, black		
Material: Cap	Thermoplastic, black		
Unit Weight (Socket/Cap)	8 g		
Storage Conditions	0 °C to 60 °C, max. 70% r.h.		
Product Marking	Voltage, Current		

Abmessungen

Mounting holes

Packaging Unit

Bulk (10 pcs.)